




MAX709_V2 User Manual

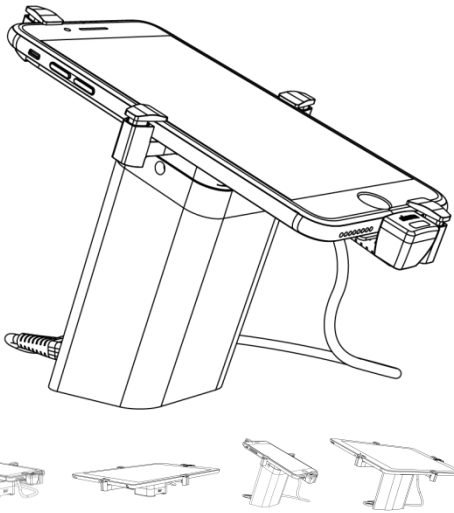

Read entire instruction guide before starting installation.

System Overview


The phone security solution of MAX_V2 is well designed based on classical standalone display solutions. It adopts the most advanced technology and has reliable standard security. All its highlights create a wonderful consumer experience, increase sales and prevent theft.

Status



1. System will be activated when connect to power source.
2. Turn off system: remove power supply and merchandise, disarm alarm by remote.
3. LED indicator: "Blue" is "on-guard", "Red" is "alarming"
4. Password setting: Match ProKEY and remote control to generate one unique password; Plug ProKEY into security device port which has a "key" logo to deliver password.

System Components


1. Stand with Power Cord
2. Charging and Alarming Cable
3. Remote Control (optional)
4. ProKEY(Optional)
5. Adapter (5.5V, 2A)
6. Bracket

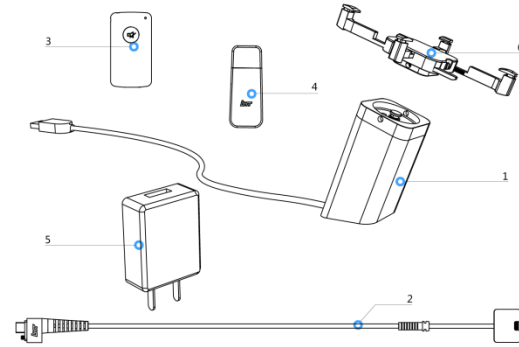

INSTALLATION STEPS

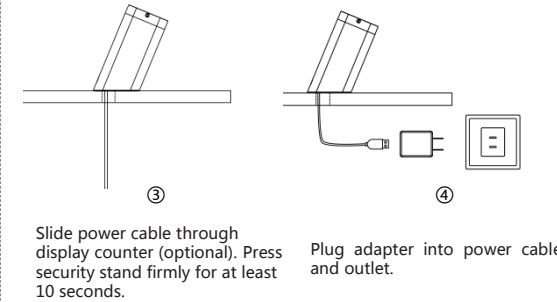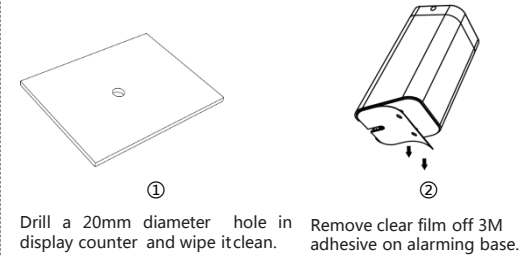


INSTALLATION STEPS

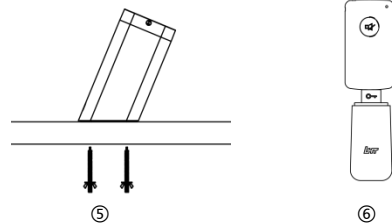

(Optional) Tighten wingnuts below counter.


(Optional) Match ProKEY and remote control to generate one unique password.

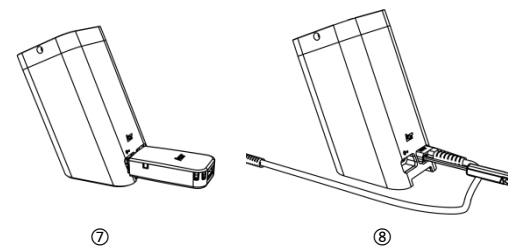

(Optional) Plug ProKEY into security device port which has a "key" logo to deliver password.

Plug micro-USB connector of charging and alarming cable into alarming base port and tighten screws.

INSTALLATION STEPS

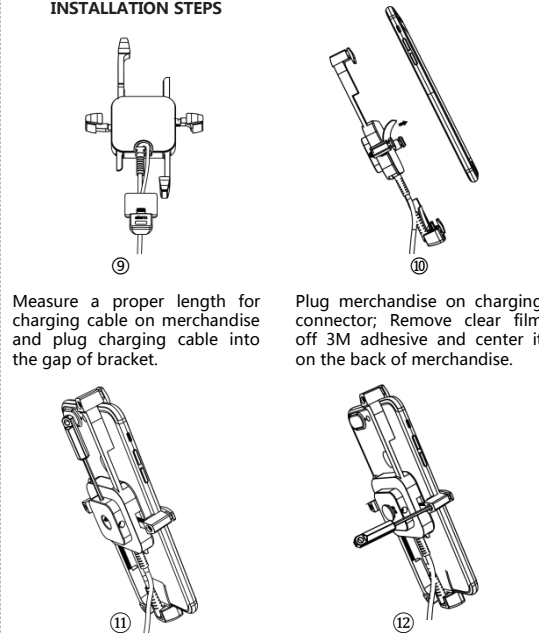


Measure a proper length for charging cable on merchandise and plug charging cable into the gap of bracket.

Plug merchandise on charging connector; Remove clear film off 3M adhesive and center it on the back of merchandise.

Adjust a proper length for bracket's arms according to merchandise.

Adjust a proper thickness for bracket's arms according to merchandise.

INSTALLATION STEPS

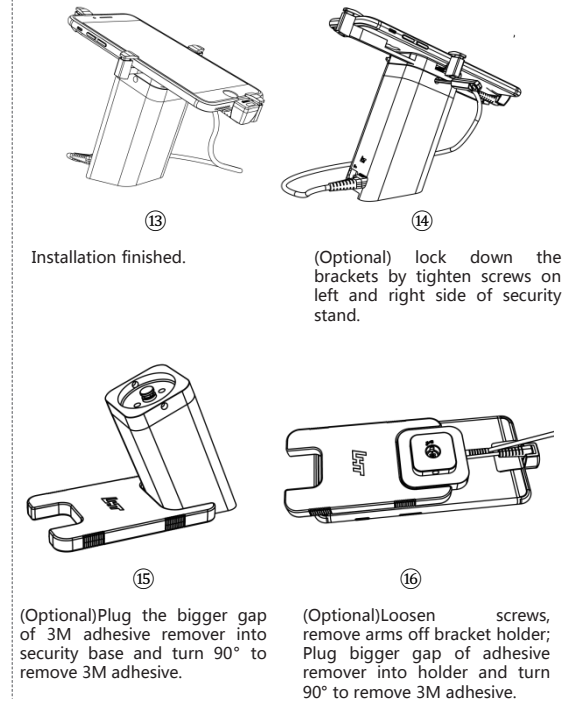

Installation finished.

(Optional) lock down the brackets by tighten screws on left and right side of security stand.

(Optional) Plug the bigger gap of 3M adhesive remover into security base and turn 90° to remove 3M adhesive.

(Optional) Loosen screws, remove arms off bracket holder; Plug bigger gap of adhesive remover into holder and turn 90° to remove 3M adhesive.

ADGOR Information Technologies CC.
 Service hotline: +264 814 995 995
 Email : info@adgorit.com
 Website: http://www.adgorit.com

Address: 11 Viljoen Street, Windhoek West
 Windhoek, Namibia